



# 3000W




## PICTURES

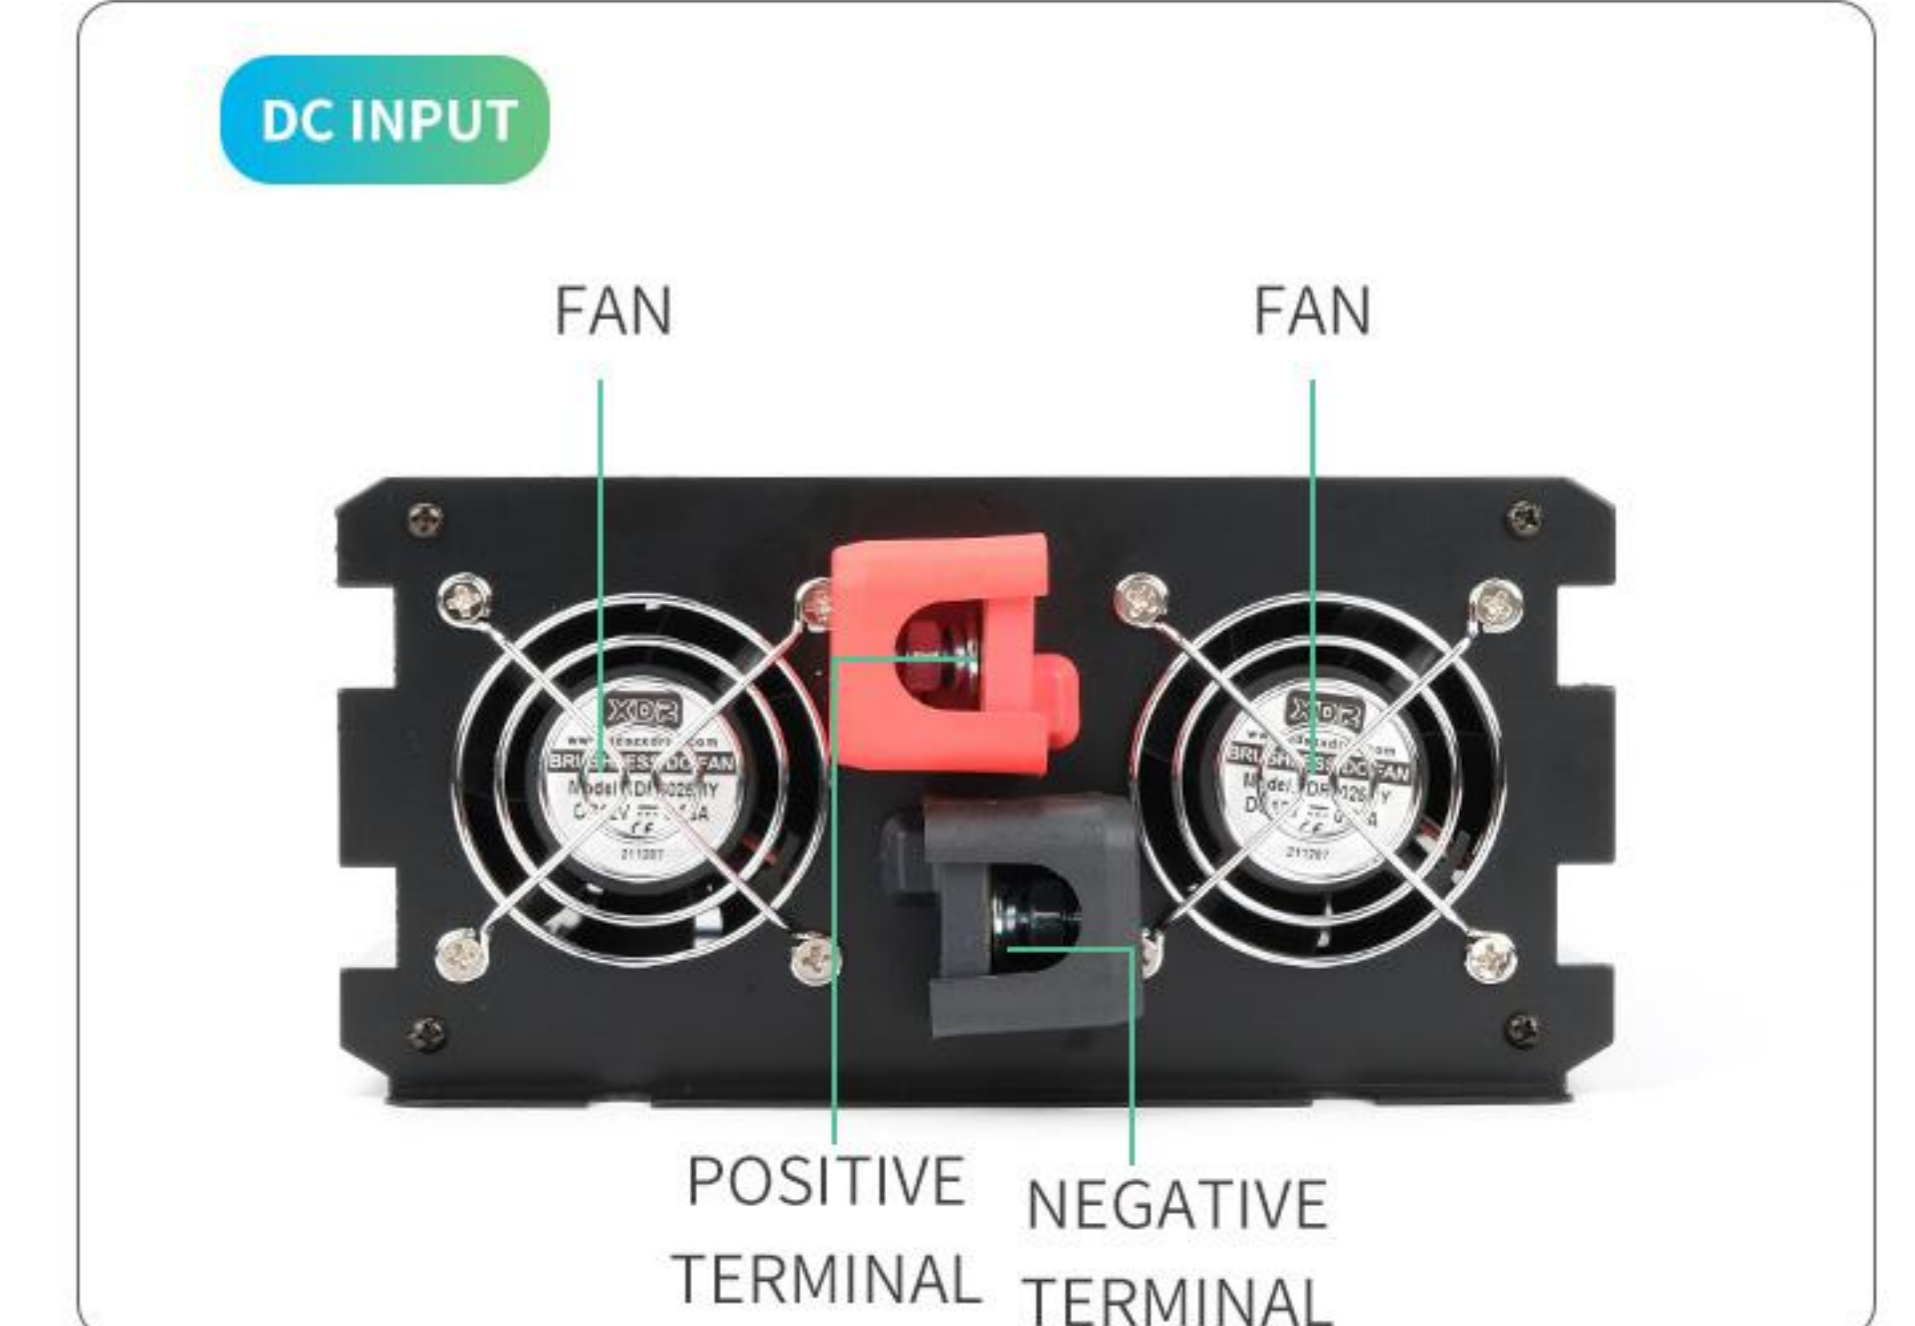

## DETAILS

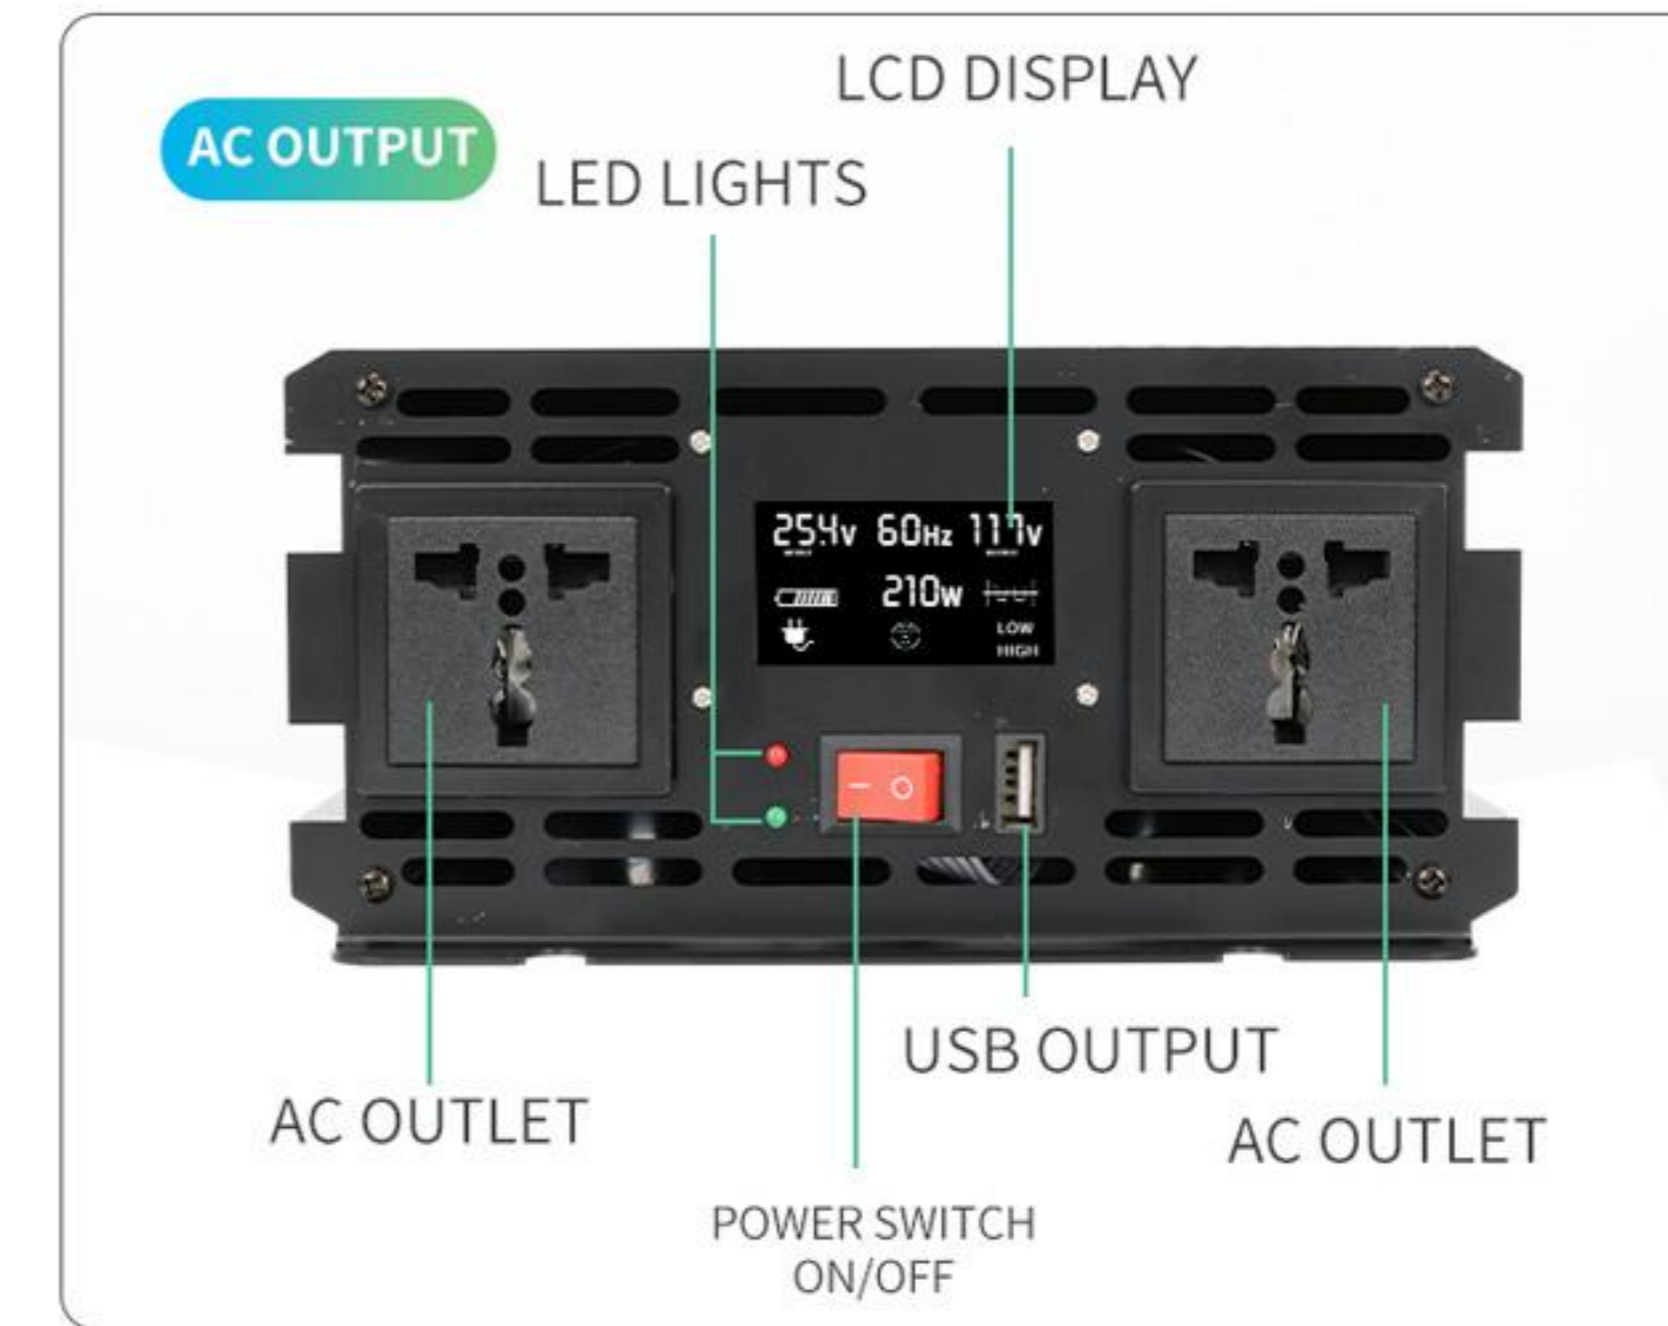

## CONNECTION

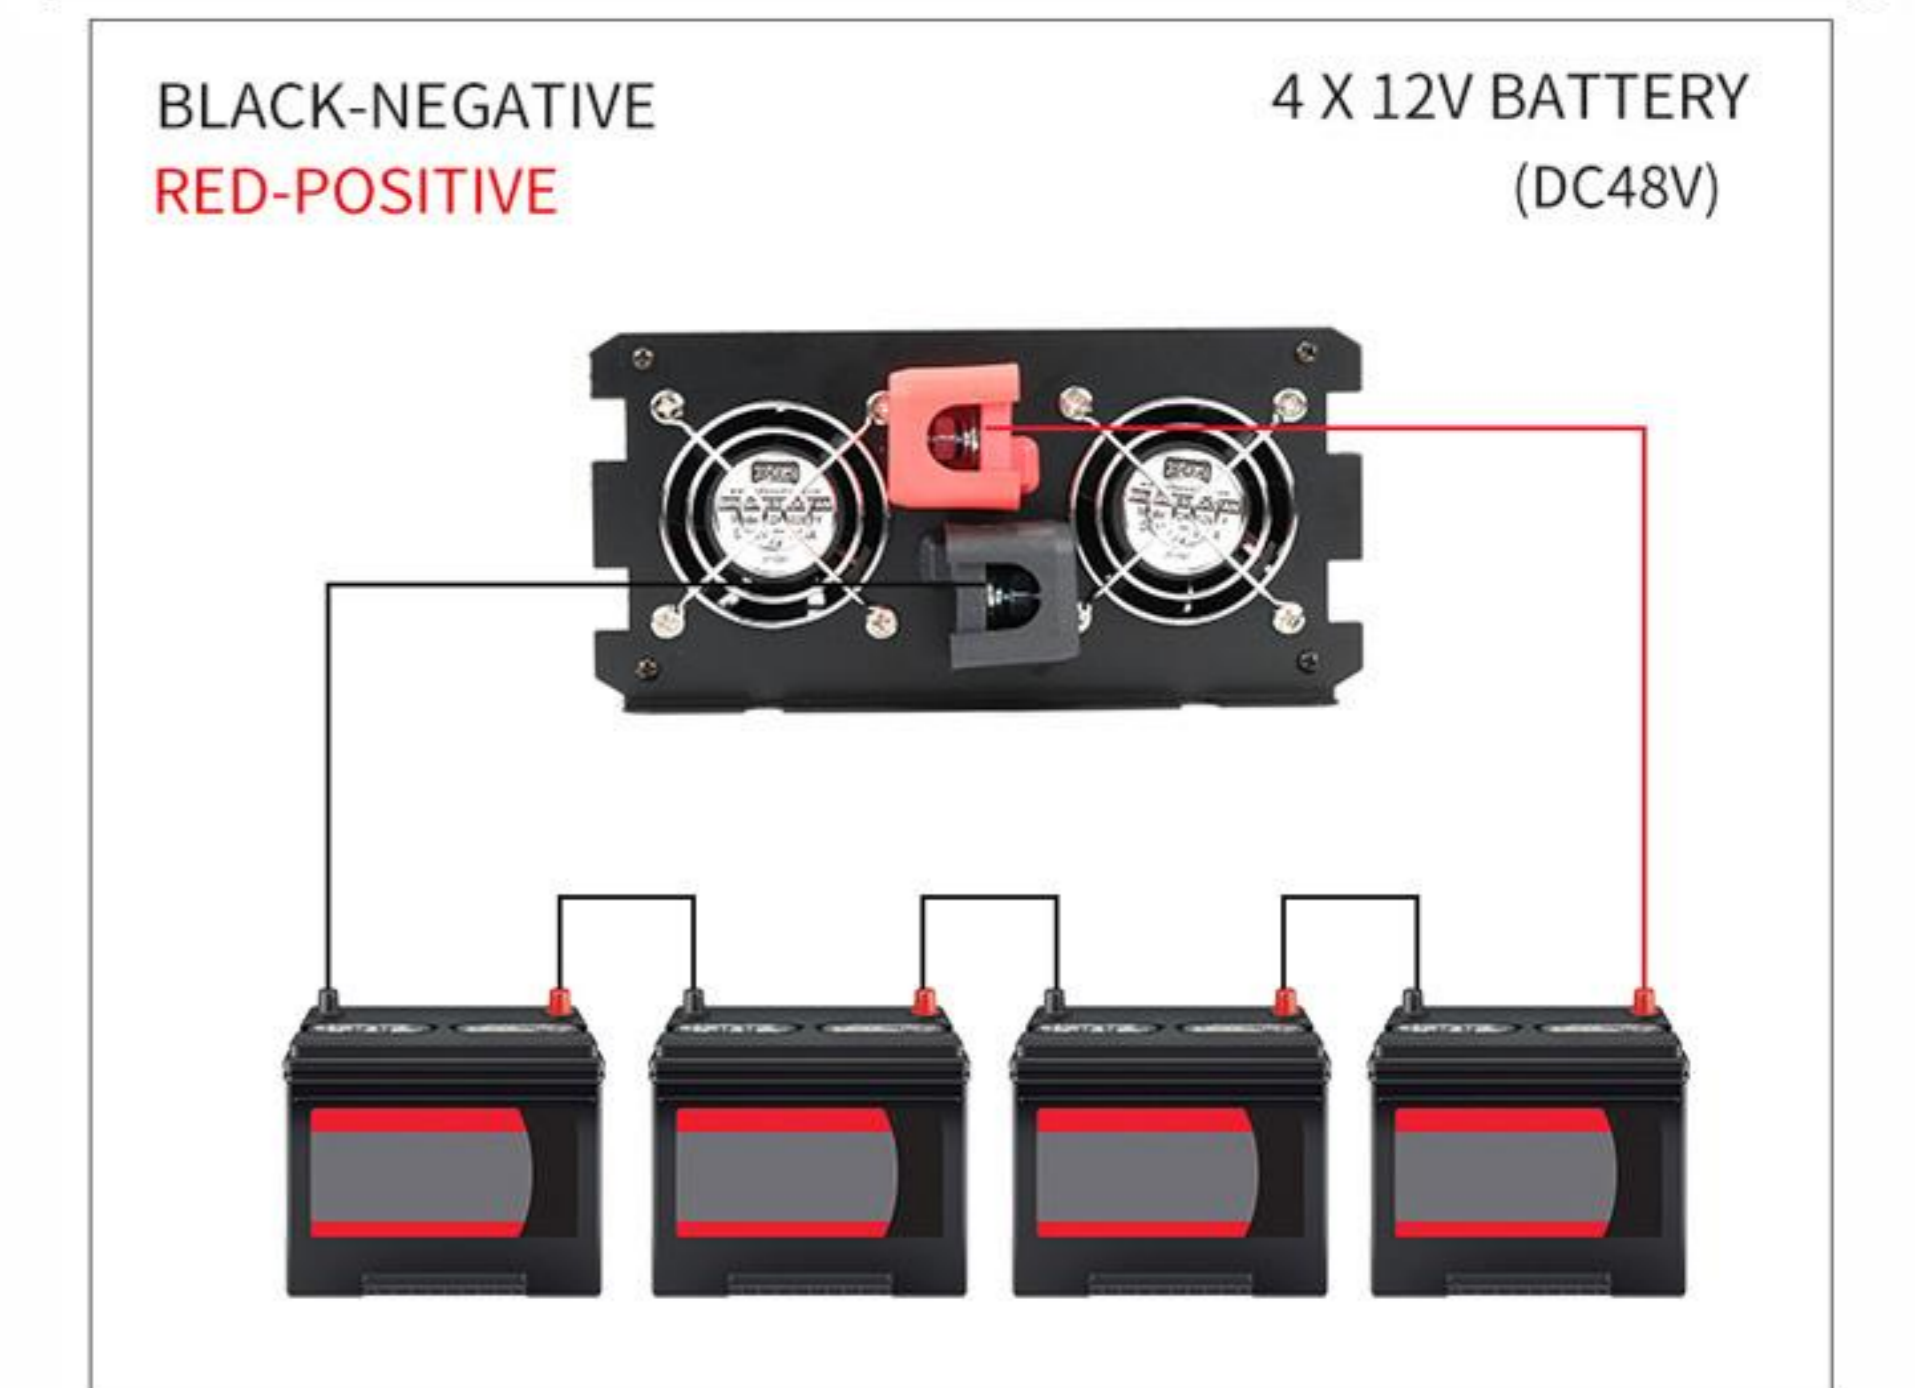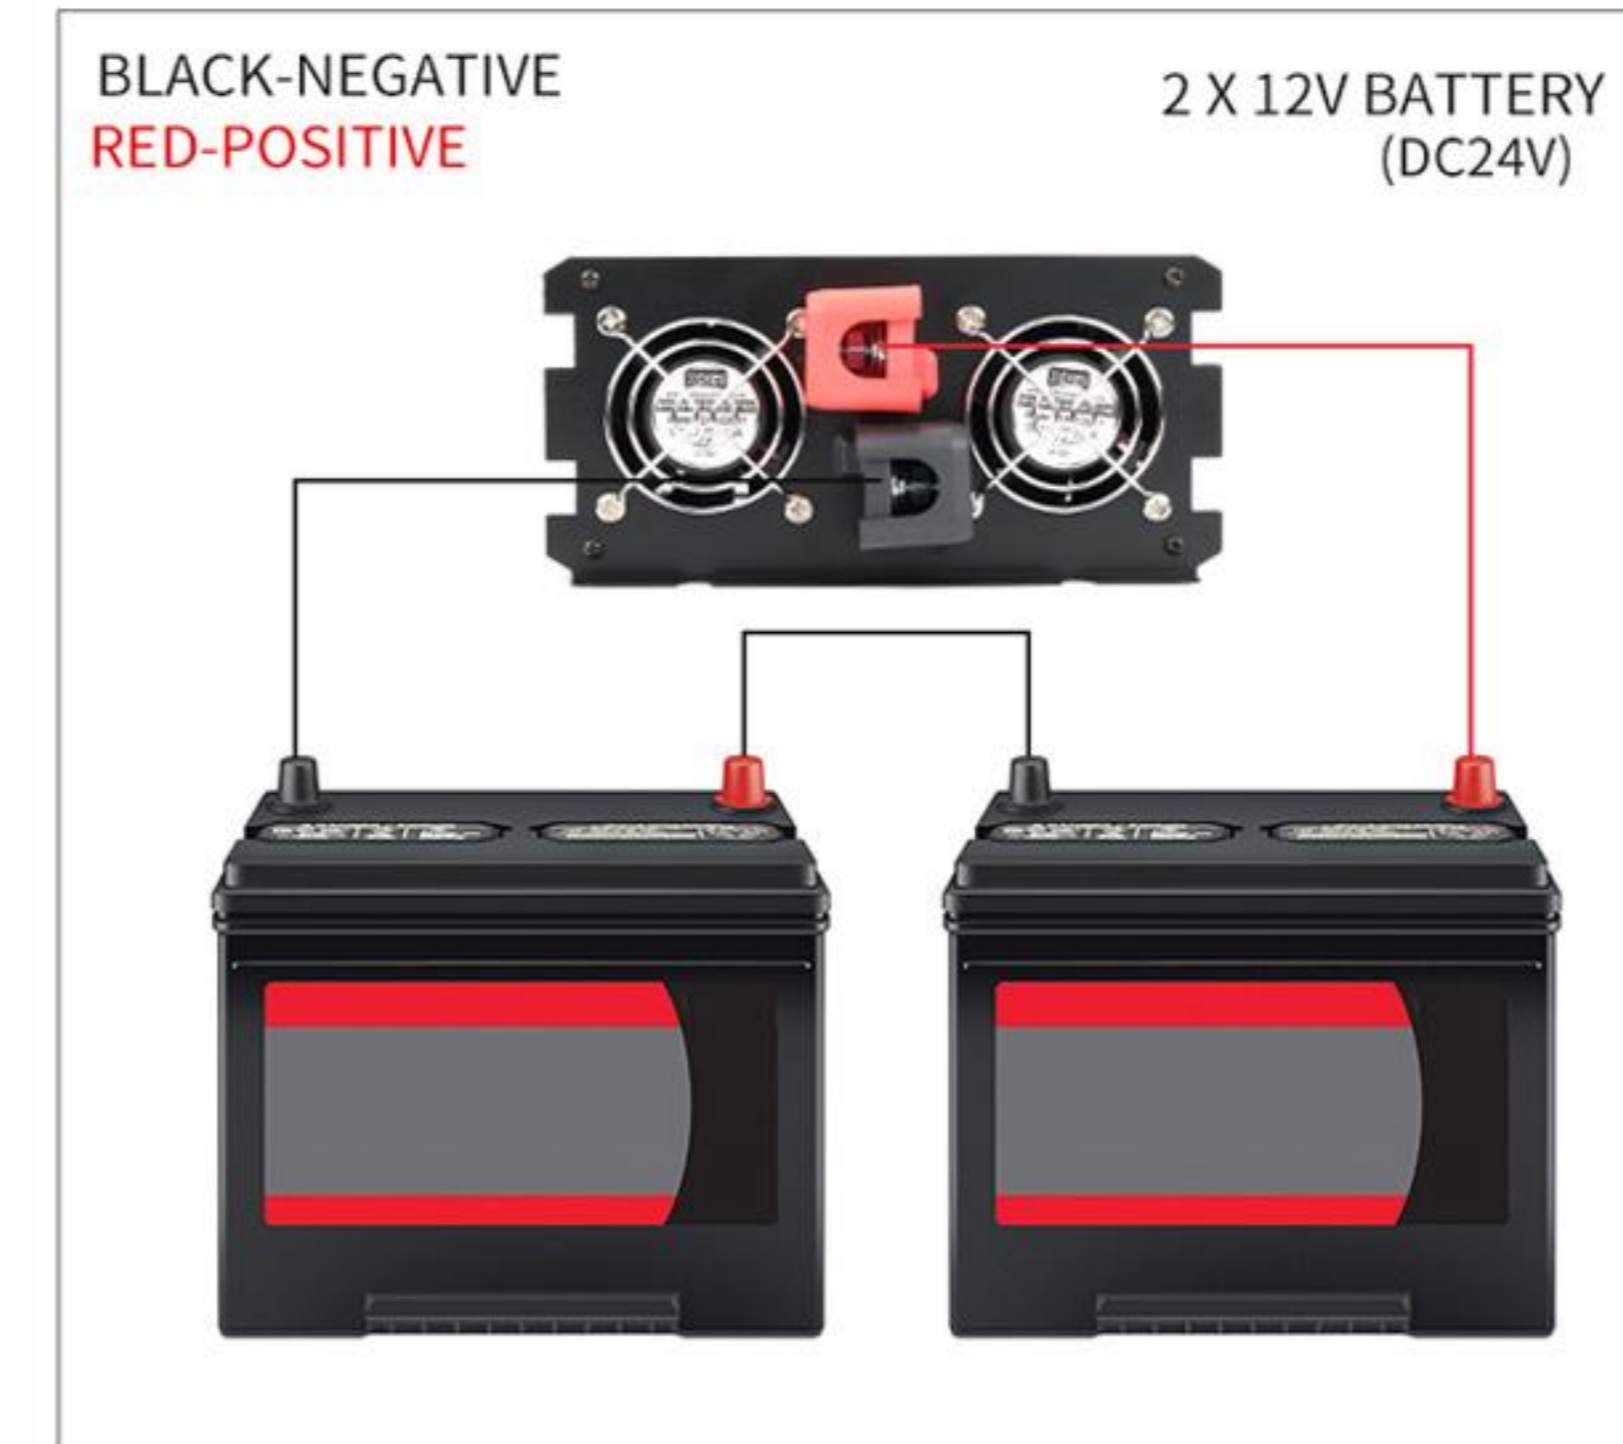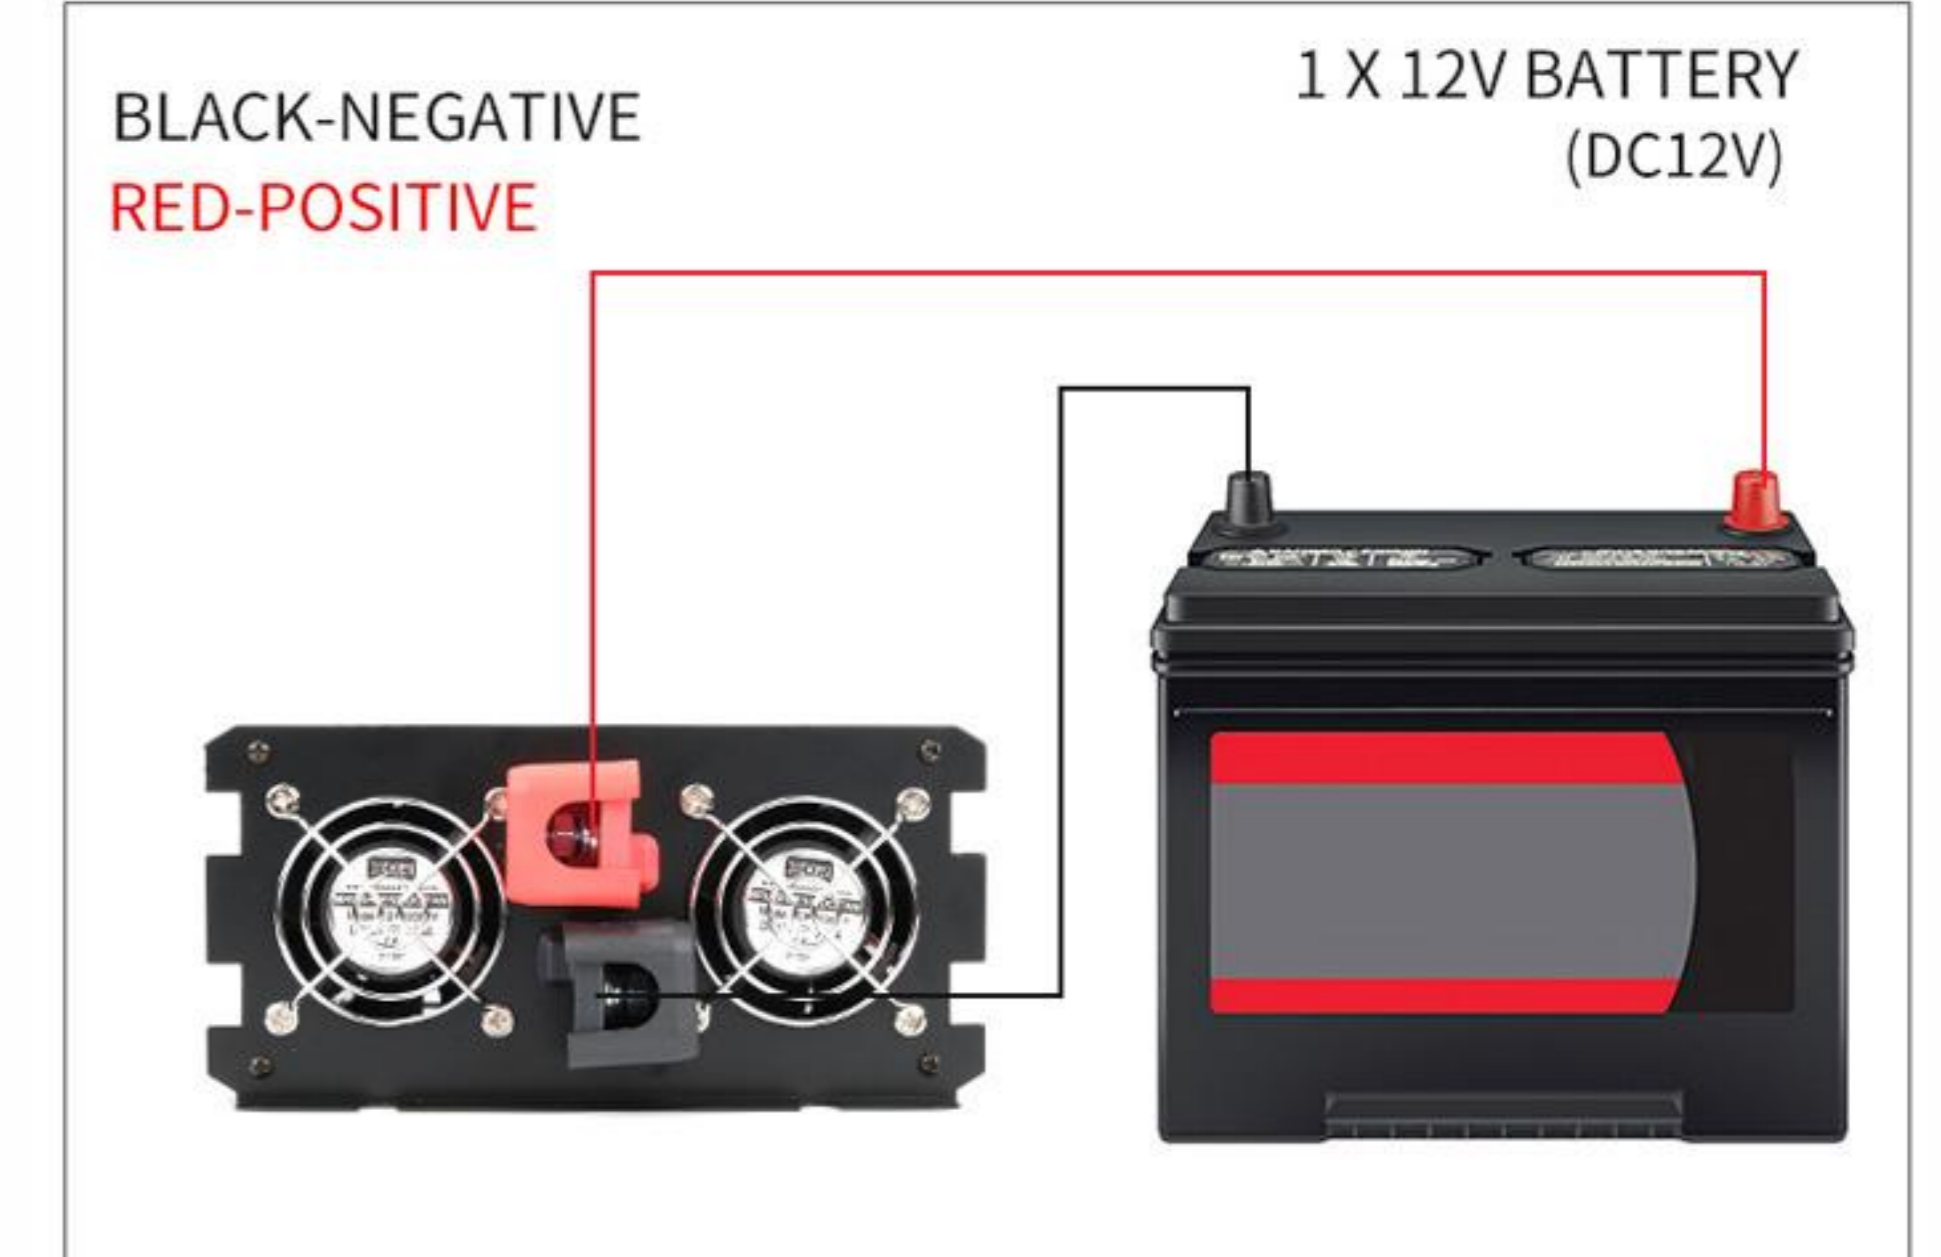



## SPEC.

Model	TM3000W-12V	TM3000W-24V	TM3000W-48V
Output power	3000W		
Peak power	6000W		
Input voltage(Range)	DC12V(9-15.5V)	DC24V(18-31V)	DC48V(38-61V)
Output voltage(Single)	(100VAC/110VAC/120VAC/220VAC/230VAC/240VAC) $\pm 5\%$		
Unload current less than	$\leq 0.3A$	$\leq 0.2A$	$\leq 0.1A$
Output frequency	50Hz or 60Hz		
Output waveform	MODIFIED SINE WAVE		
USB	18W Fast charging		/
Max.output efficiency	88%	90%	92%
Low voltage protection	Pre-alarm (alarm off after 1 sound), LED Red light on, voltage contiously reduce and shutdown		
Over voltage protection	Pre-alarm (alarm off after 2 sounds), LED Red light on, shutdown		
Overload protection	Continuous alarm, LED Red light on, shutdown		
Over temperature protection	Pre-alarm (alarm off after 3 sounds), temprature continously rise, LED Red light on, shutdown		
Short circuit protection	Perfect protection and no damage the circuit		
Input reverse polarity protection	Fuse burn-out		
Low voltage alarm	$10.5 \pm 0.5V$	$21 \pm 0.5V$	$42 \pm 1V$
Low voltage protection	$9.5 \pm 0.5V$	$19 \pm 0.5V$	$38 \pm 1V$
Over voltage protection	$15.5 \pm 0.5V$	$31 \pm 0.5V$	$61 \pm 1V$
Low voltage recover	$13 \pm 0.5V$	$24 \pm 0.5V$	$48 \pm 1V$
Over voltage recover	$14.5V \pm 0.5V$	$29V \pm 0.5V$	$58V \pm 1V$
Working temperature	$-20^{\circ} - +50^{\circ}$		
Product Dimension(mm)	400*180*90		
Mounting Size(mm)	370*100		
Net./gross weight(kgs)	5.08/6.04		
QTY/CTN	19.12		
Warranty	24Months		
DC Cable(mm <sup>2</sup> )	35	16	8
Cooling method	Intelligent air cooling		

## CHOOSE SOCKET



UNIVERSAL



AUSTRALIA



BRITISH



EUROPE



FRENCH



AMERICAN



SOUTH AFRICA

MORE STYTLE  
CHECK WITH SALES

OTHERS