



500W




PICTURES

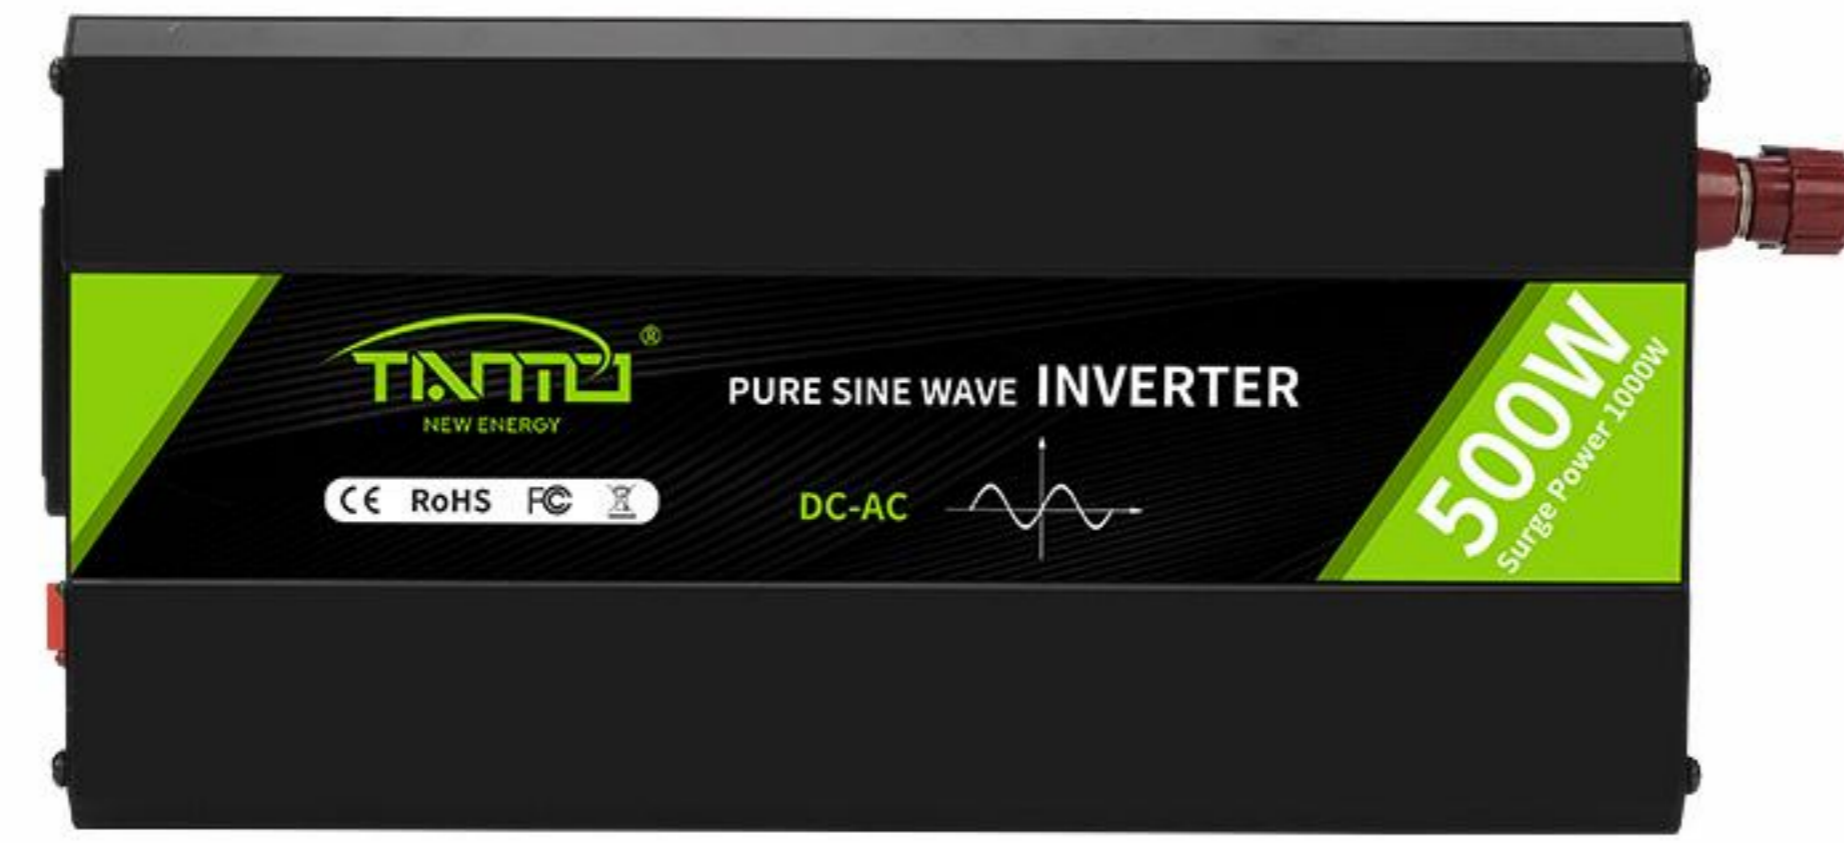

DETAILS

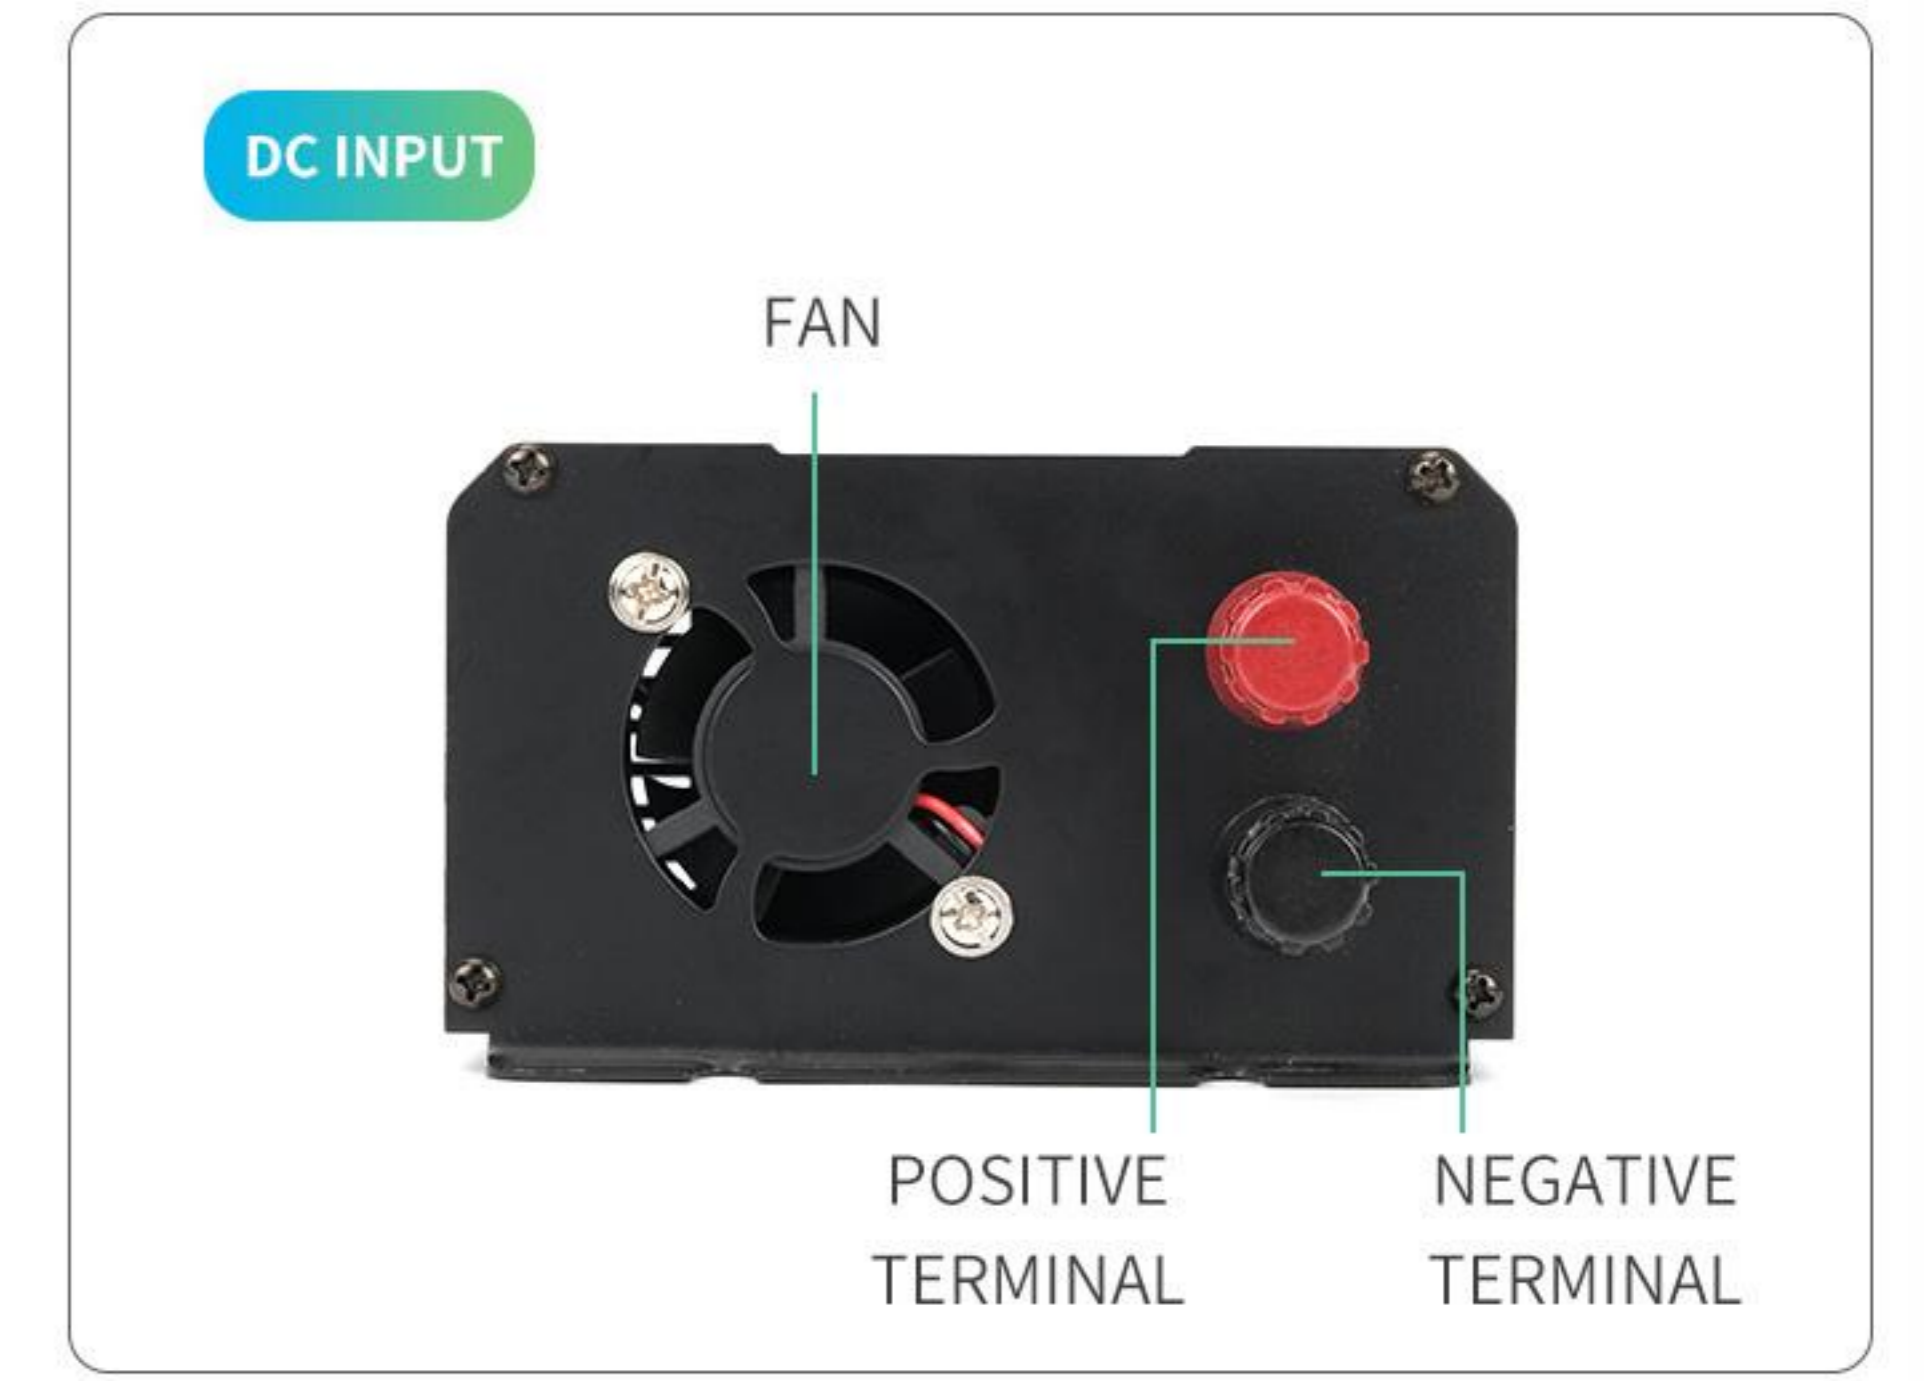

CONNECTION

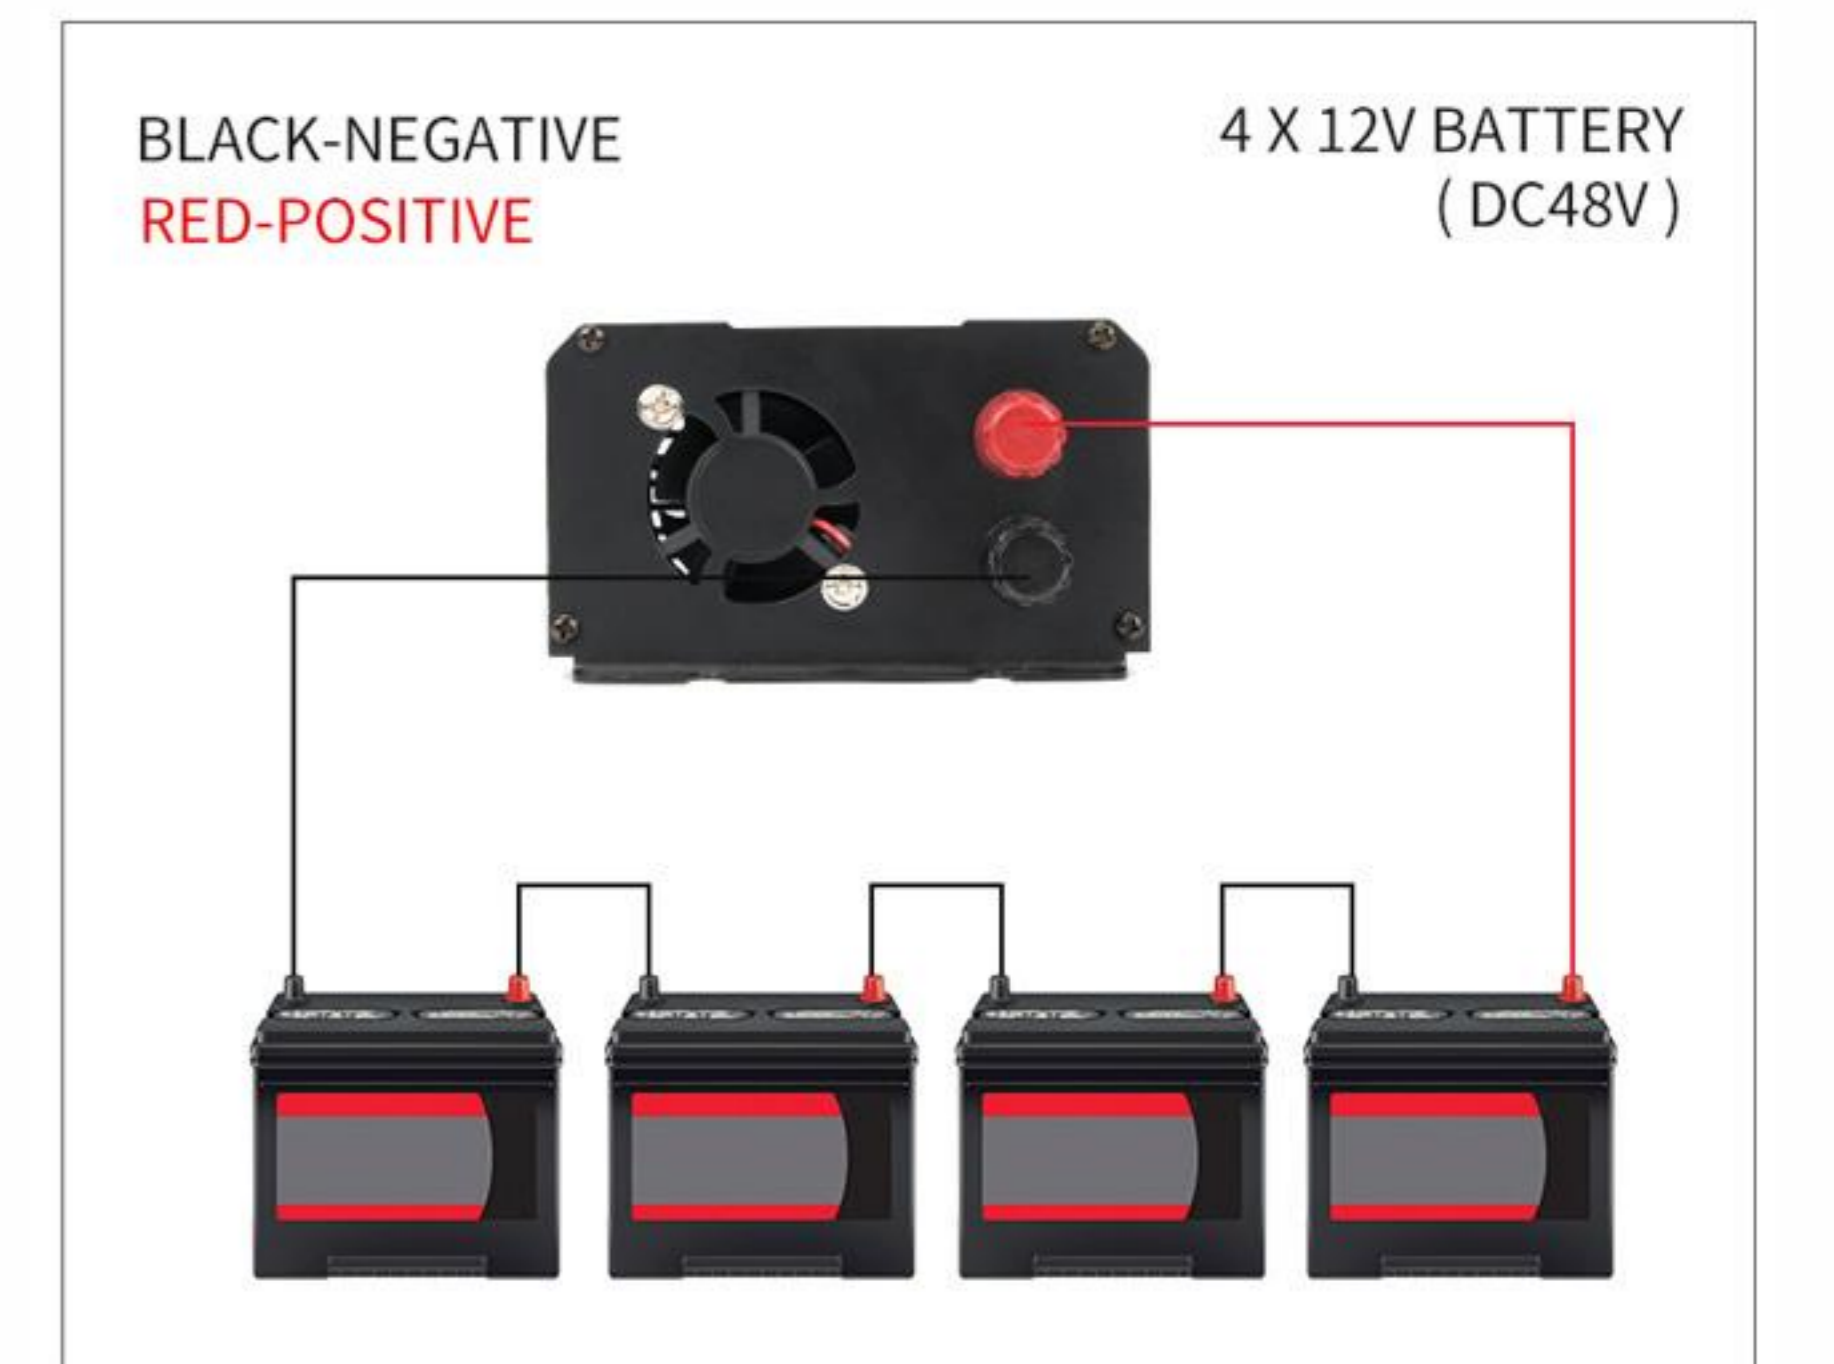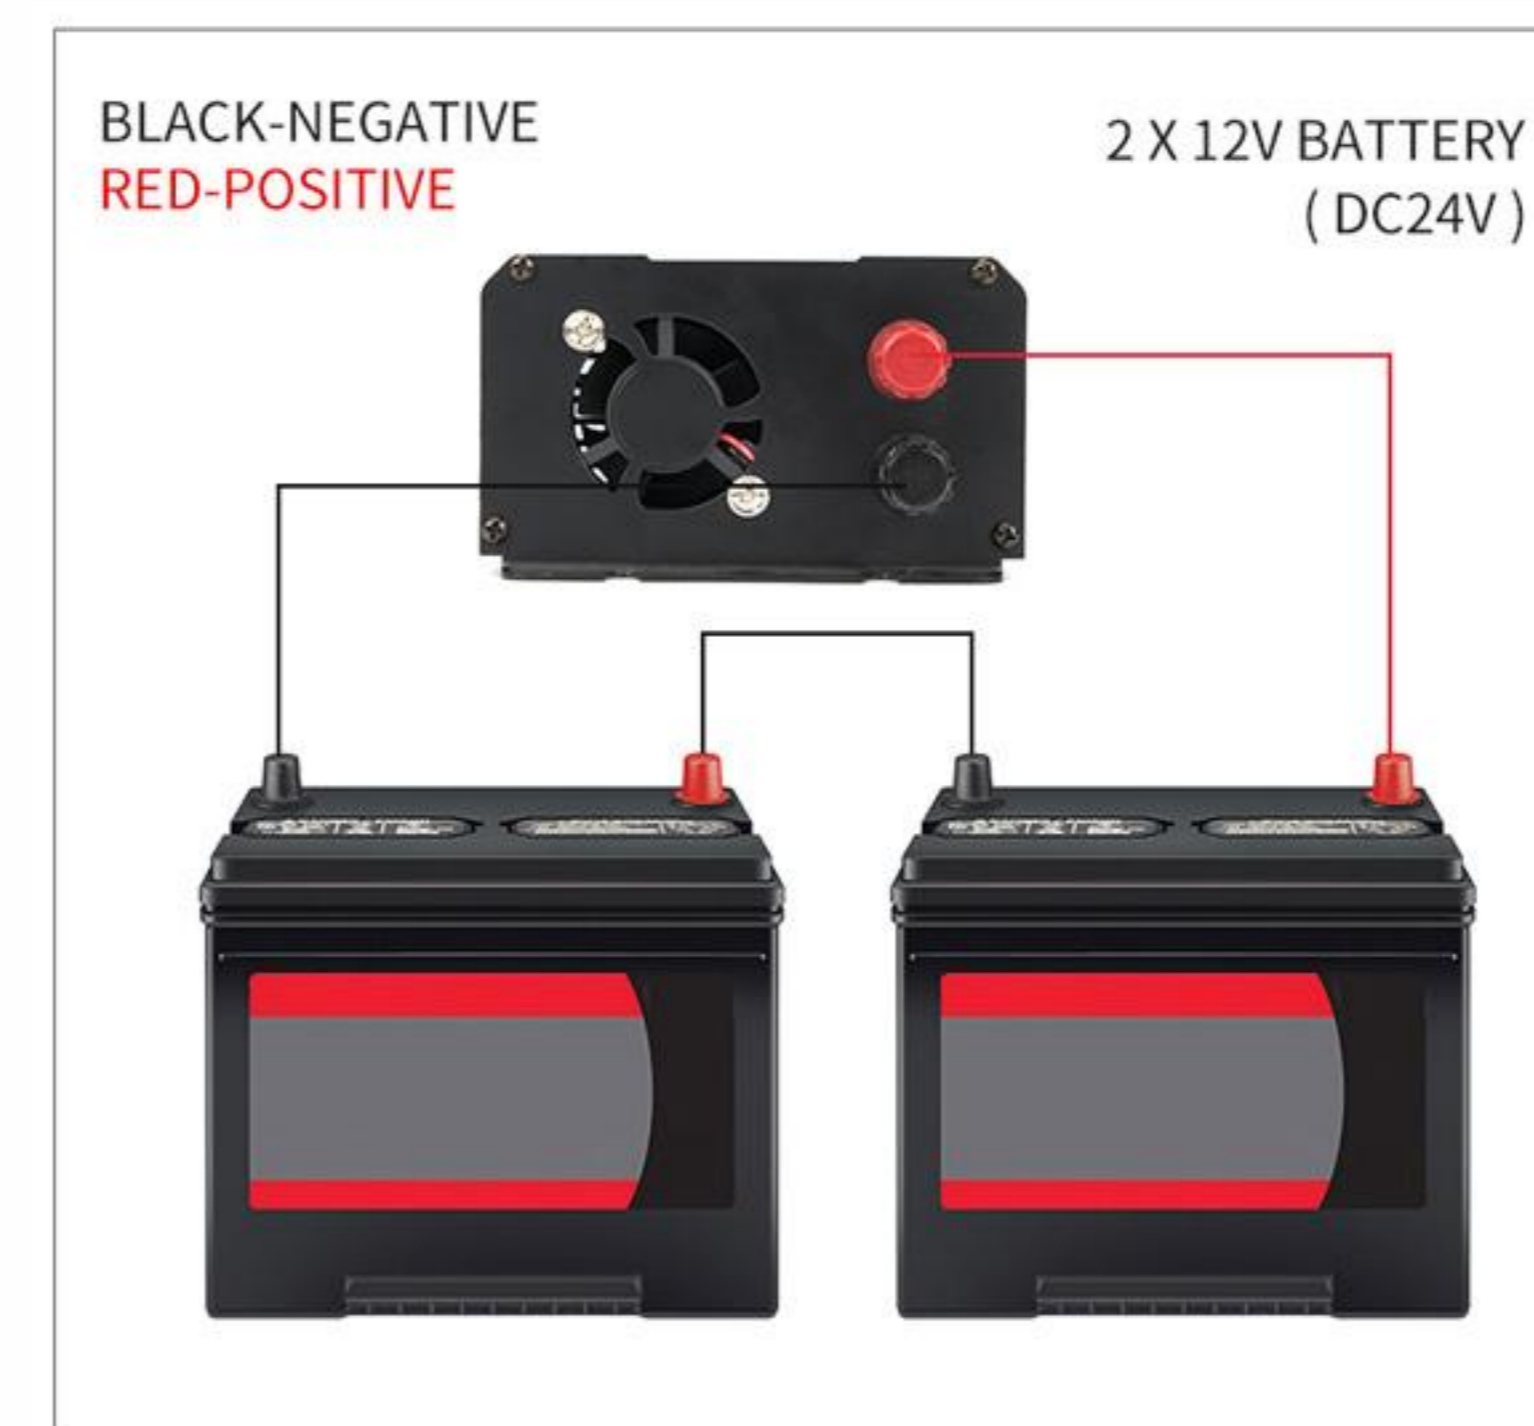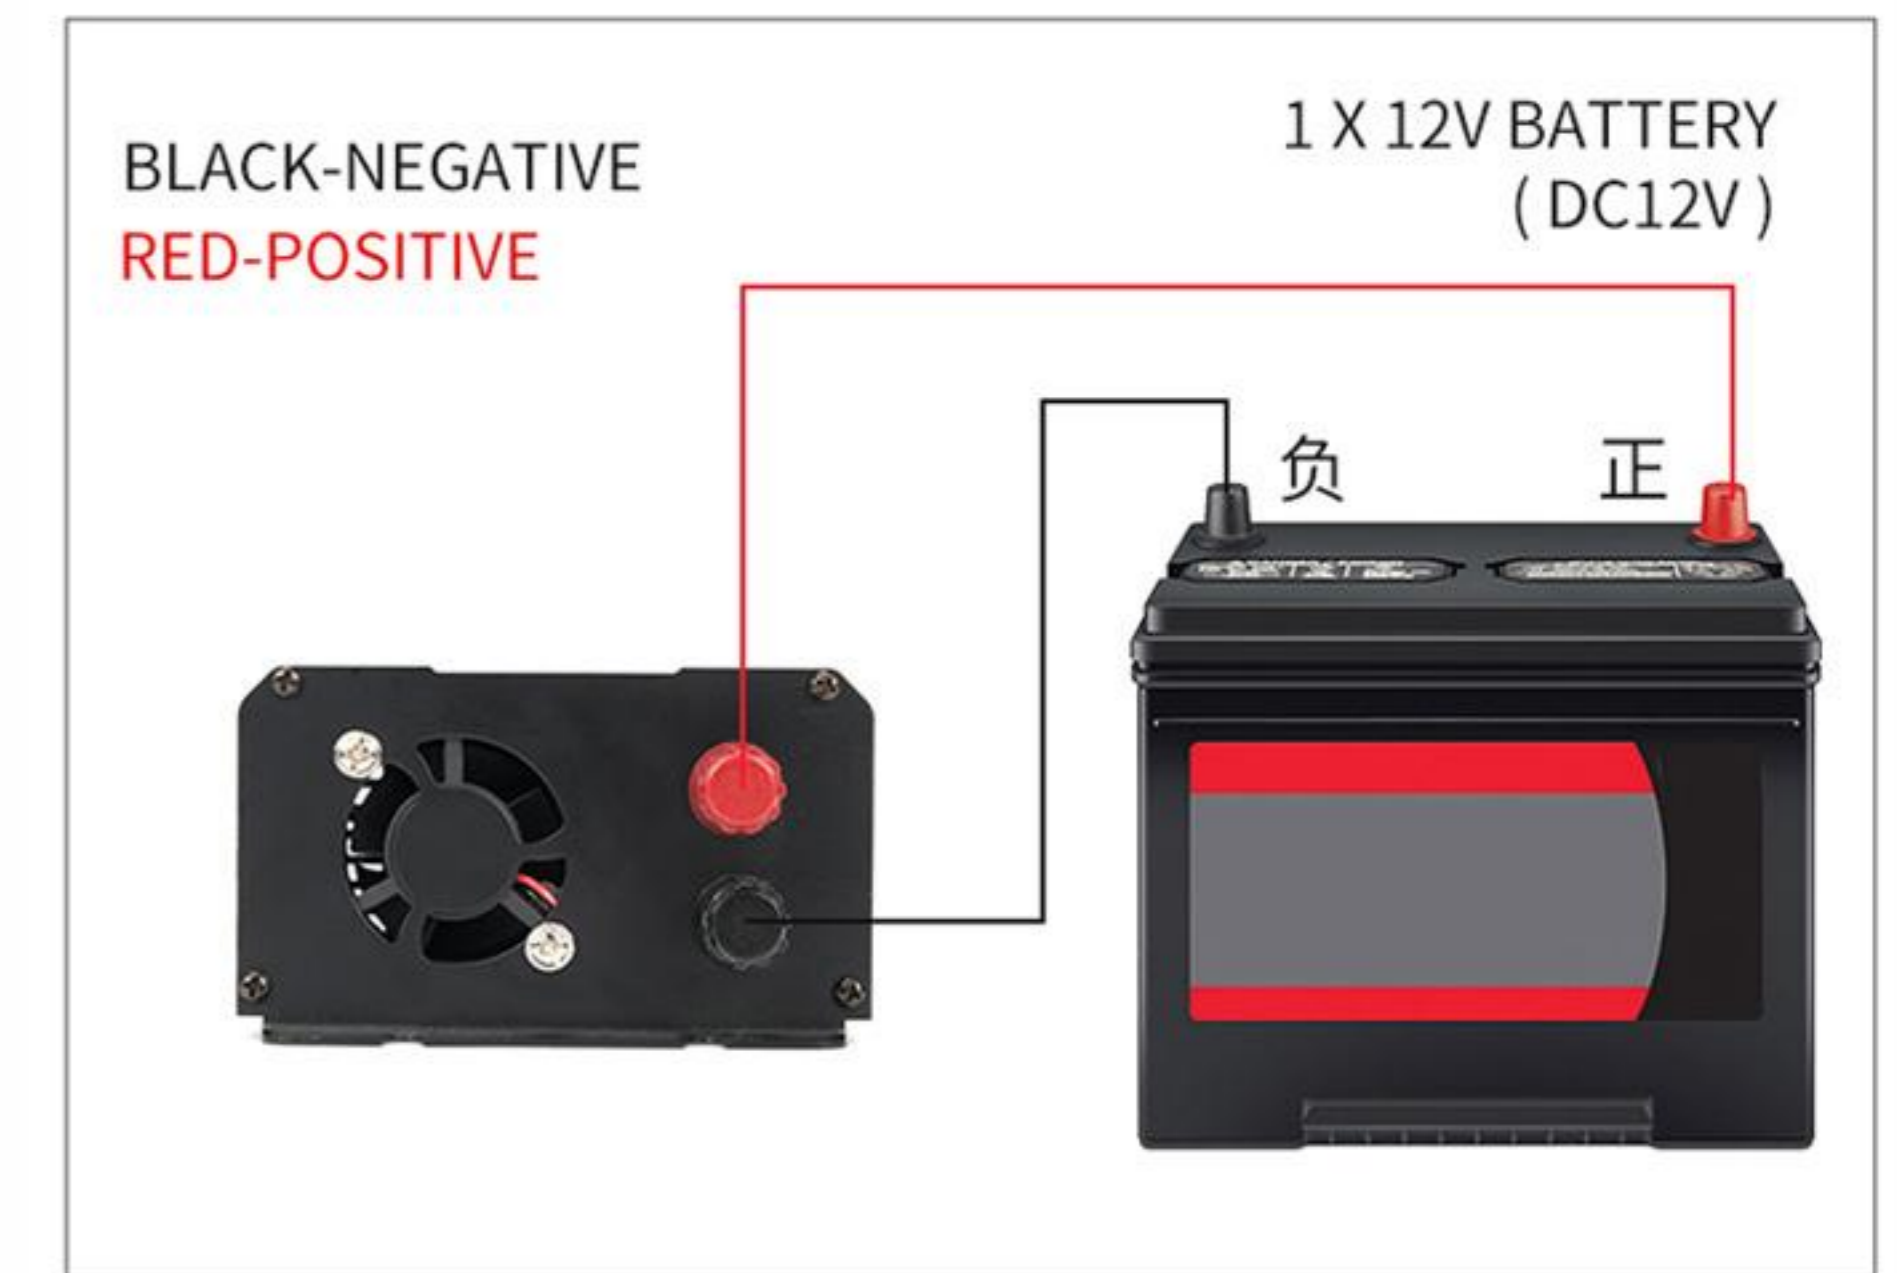



SPEC.

|                                   |   |               |               |
|-----------------------------------|---|---------------|---------------|
| Model                             | TP500W-12V  | TP500W-24V    | TP500W-48V    |
| Output power                      | 500W  |               |               |
| Peak power                        | 1000W   |               |               |
| Input voltage(Range)              | DC12V(9-15.5V)  | DC24V(18-31V) | DC48V(38-61V) |
| Output voltage(Single)            | (100VAC/110VAC/120VAC/220VAC/230VAC/240VAC) ±5%   |               |               |
| Unload current less than          | ≤0.4A   | ≤0.2A         | ≤0.2A         |
| Output frequency                  | 50Hz or 60Hz  |               |               |
| Output waveform                   | Pure sine wave  |               |               |
| Waveform distortion               | THD≤3%(Pure resistive Load )  |               |               |
| USB                               | 18W Fast charging   |               | /             |
| Max.output efficiency             | 88%   | 90%           | 92%           |
| Low voltage protection            | Pre-alarm (alarm off after 1 sound), LED Red light on, voltage contiously reduce and shutdown |               |               |
| Over voltage protection           | Pre-alarm (alarm off after 2 sounds), LED Red light on, shutdown                              |               |               |
| Overload protection               | Continuous alarm, LED Red light on, shutdown  |               |               |
| Over temperature protection       | Pre-alarm (alarm off after 3 sounds), temprature continously rise, LED Red light on, shutdown |               |               |
| Short circuit protection          | Perfect protection and no damage the circuit  |               |               |
| Input reverse polarity protection | Fuse burn-out   |               |               |
| Low voltage alarm                 | 10.5±0.5V   | 21±0.5V       | 42±1V         |
| Low voltage protection            | 9.5±0.5V  | 19±0.5V       | 38±1V         |
| Over voltage protection           | 15.5±0.5V   | 31±0.5V       | 61±1V         |
| Low voltage recover               | 13±0.5V   | 24±0.5V       | 48±1V         |
| Over voltage recover              | 14.5V±0.5V  | 29V±0.5V      | 58V±1V        |
| Working temperature               | -20°- +50°  |               |               |
| Product Dimension(mm)             | 246*107*63  |               |               |
| Mounting Size(mm)                 | 221*50  |               |               |
| Net./gross weight(kgs)            | 0.96/1.15   |               |               |
| QTY/CTN                           | 15PCS   |               |               |
| Warranty                          | 24Months  |               |               |
| DC Cable(mm <sup>2</sup> )        | 6   | 4             | 2.5           |
| Cooling method                    | Intelligent air cooling   |               |               |

CHOOSE SOCKET



UNIVERSAL



AUSTRALIA



BRITISH



EUROPE




FRENCH



AMERICAN



SOUTH AFRICA

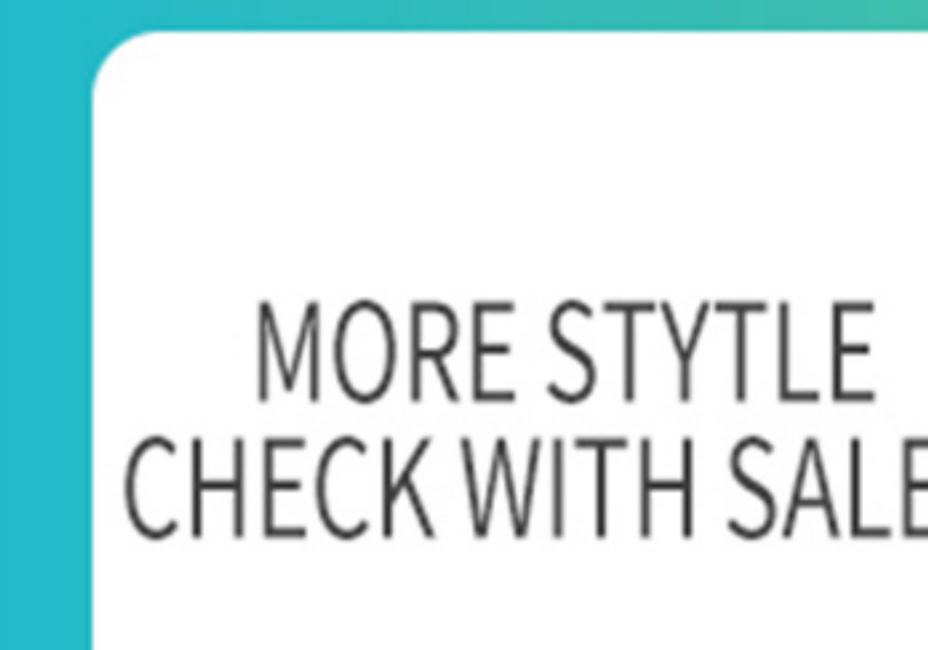

MORE STYTLE  
CHECK WITH SALES

OTHERS